

ONWAVE 3 ECO

GLASS DOOR MULTI-DECK CHILLER




FEATURES INCLUDE:

Hinged glass doors (double glazed)
White internal
RAL 9002 grey white external
RAL 9007 Base Panel
High efficiency fan motors
Stainless steel front bumper

5 levels height adjustable shelves + base
Shelf pricing holders
LED Canopy lighting incl. switch
Electronic temperature control
Castor wheels
Optional shelf product fences

ONWAVE 3 ECO

GLASS DOOR MULTI-DECK CHILLER

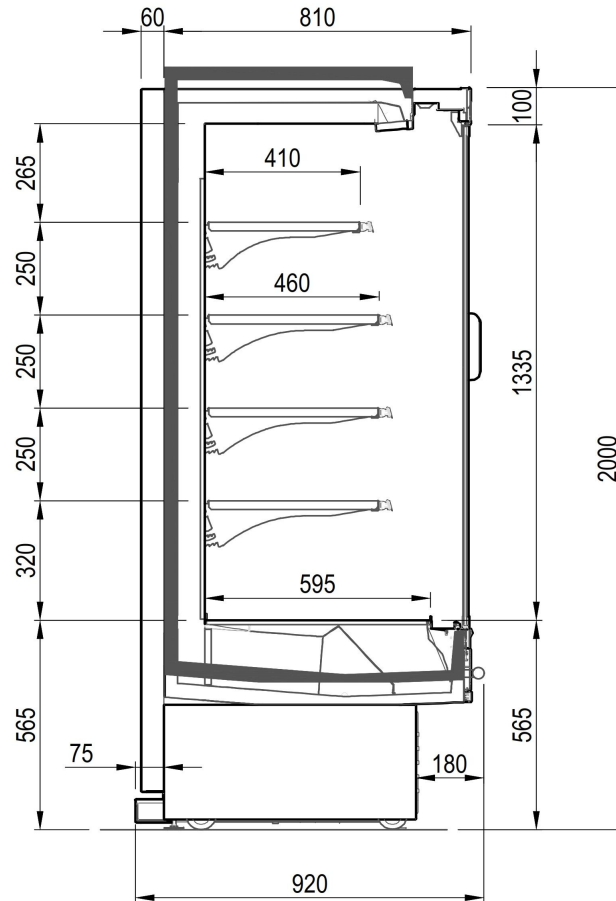

ONWAVE 3 ECO	1250	1875	2500
* Operating Temp (°C)	0/+2	0/+2	0/+2
Number of Doors	2	3	4
Refrigeration	Ventilated/R290		
Defrost	Automatic		
Power Supply	230V/1Ph/10 Amp plug		
Operating Current (Amp)	1.7	2.5	3.5
Nominal Power (W)	372	560	796
Energy Consumption (kWh/24h)	6.7	7.8	12.5
Lighting Power (W)	54	78	108
Display Surface (m ²)	3.58	5.37	7.17
Length (mm) with endwall	1310	1935	2560
Height incl. castors (mm)	2000	2000	2000
Depth with bumper (mm)	920	920	920
Weight with packaging (kg)	280	430	500
Weight w/o packaging (kg)	260	400	460

* Climate class 3 (25°C, 60%R/H)