


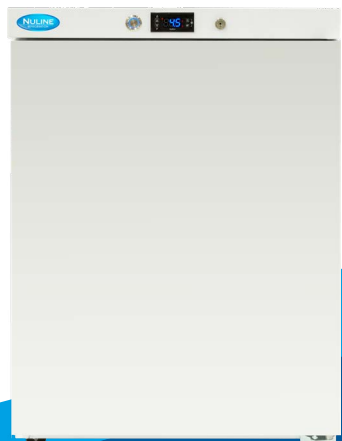


# HF SERIES SPARK SAFE FREEZER

**NULINE**  
REFRIGERATION

## FEATURES

- Audible Alarm
- Static Refrigerated Shelves
- Door Lock
- Digital Display with Built-in Alarms
- Bottom Mounted System
- Hi/Lo Readout
- Remote Alarm Contacts



	-18°C to -22°C
	135 L 350 L 570 L
	595w x 650d x 830h 595w x 650d x 1850h 775w x 750d x 1850h

+61 3 9562 3355  
info@nuline.au  
7 Longford Court, Springvale VIC 3171  
[www.nulinerefrigeration.com.au](http://www.nulinerefrigeration.com.au)

# HF SERIES SPARK SAFE FREEZER



MODEL	HF200	HF400	HF600
Gross Capacity	135 L	350 L	570 L
External Dimensions in mm (w/d/h including castors or legs)	595 x 650 x 830	595 x 650 x 1850	775 x 750 x 1850
Internal Dimensions in mm (w/d/h)	455 x 445 x 665	455 x 445 x 1685	635 x 545 x 1685
Packed Dimensions in mm (w/d/h including pallet)	640 x 670 x 1005	640 x 670 x 2010	830 x 790 x 2010
Gross Weight – kg (packed weight)	42	79	102
Net Weight – kg	39	74	94
Energy Consumption	402 kWh/y	795 kWh/y	896 kWh/y
Voltage	240V		
Temperature Range	-18°C to -22°C		
Ambient Temperature Range	10°C to 32°C		
Refrigerant	R600a	R290	
Cooling System / Defrost	Static		
Exterior Cabinet Finish	Enamelled Steel		
Inner Liner Material	ABS		
Door	Solid		
Door Hinge	Right		
Door Handle	Pull Handle		
Type of Controller	Digital		
Temperature Display	External		
Data Logger	Optional		
Door Ajar Alarms	Optional		
High and Low Readout	Visual / Audible		
Remote Alarm Contacts (Bms Connectivity for Alarms only) (Bms Connectivity for Temperatures)	Yes Optional		
Port Entry	Optional		
Battery Back-Up for Controller	Optional		
Power Requirement	10amp GPO		
Watts	75W	205W	220W
Castors	No adjustable levelling legs		
Adjustable Shelves	Fixed		
Usable Shelf Area in mm (w/d)	2 x 455 x 405	6 x 455 x 405	6 x 635 x 505

Nuline Refrigeration reserves the right to alter the specifications without prior notice.