

Two Door Glass Chiller

Range: BackBar

SKOPE ID: GC002


Dimensions: 1585 mm (W) × 590 mm (D) × 870 mm (H)*

Capacity: 290 L

Project: _____

Item #: _____

* Height with legs is adjustable from 855 to 890.

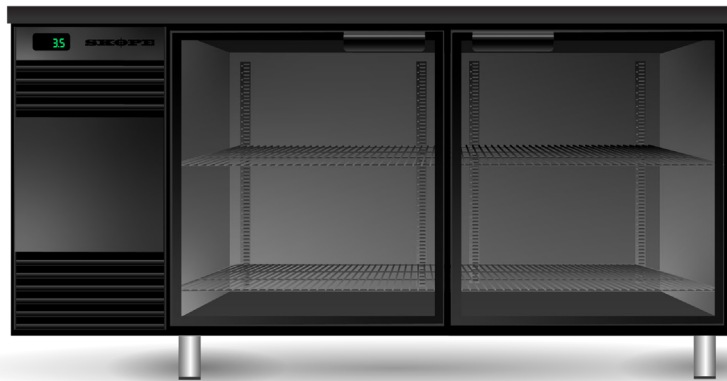

A 2-door under-bar glass chiller designed to keep your bar glasses cool and easily accessible to service staff in busy bars, clubs, and hotels. With a sleek aesthetic, including frameless glass doors, you can create an integrated look for all under-counter glass door bar refrigeration alongside SKOPE's BackBar range. The body is made from powder-coated, galvanised steel with colour options; it can also be upgraded to full stainless steel construction. The cabinet features wire shelving that can accommodate glass racks at either 355 mm × 430 mm, or 430 mm × 430 mm, for keeping your glasses chilled. The glass doors are designed for condensation protection in standard operating environments via the double-glazed, argon-filled, low-e, insulated panels. The glass chiller uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output, with a remote version also available. The slim side-mounted and front-breathing refrigeration system wastes the absolute minimum of your precious floor space, while the fully removable refrigeration cartridge can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant

© 2023 SKOPE Industries Limited | We reserve the right to alter specifications without notice.


Email: skope@skope.com

AUS Freephone: 1800 121 535

NZ Freephone: 0800 947 5673

skope.com



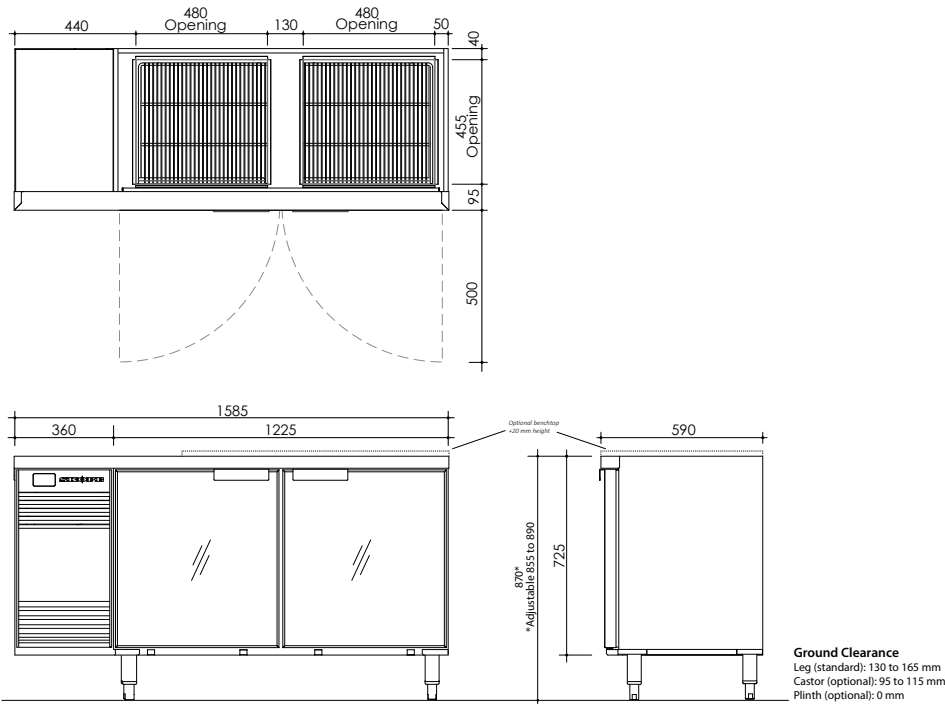

Cabinet

Type	Glass Chiller		
Finish	Powder-coated galvanised steel or stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Doors	Type	Glass swing door (double-glazed, low-e, argon-filled)	
	Opening Size	Height (mm)	535
		Width (mm)	510
Top Opening (x 2)	Depth (mm)	455	
	Width (mm)	480	
Shelving	Six powder-coated wire shelves		
	1 x fixed bottom shelf (550W x 450D), 1 x fixed bottom shelf (515W x 450D), 2 x adjustable height shelf (550W x 450D), 2 x adjustable height shelf (515W x 450D)		
Lighting	Sign	n.a.	
	Interior	n.a.	
Night Lid	Perspex		

Dimensions†

	External	Internal	Packed
Width (mm)	1585	1120	TBC
Depth (mm)	590	475	TBC
Height (mm)	855 to 890 (standard legs)		
	725 (plinth)	545	TBC
	820 to 840 (castors)		
Weight (kg)	166	TBC	
Capacity (L)	290		
Footprint (m²)	0.94		

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

Performance

Temperature Range (°C)	1 to 4		
Maximum Ambient Temperature (°C)	40		
Sound Power Level (dB(A))	Standard	< 66	

Ventilation (mm)

Top	Not required	Sides	Not required	Rear	Not required
-----	--------------	-------	--------------	------	--------------

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply		
Cord	1.9 m power cord with 3-pin, 10 amp plug		
Current draw (A)	2.6		

Refrigeration

Controller	SCS Connect		
System Type	Removable cartridge		
Cartridge Weight (kg)	24		
Refrigerant/Charge	R290/81 g		
Nominal Capacity (W)	650 (EN12900 MBP)		
Heat Rejection (W)	Average	90	Peak 110
Defrost Type	Automatic, off-cycle		
Drainage	No plumbing required		



GC.2.GSW
on the SKOPE website

