

Phone: 1300 733 715

Email: admin@fridgeandfreezer.com.au



https://www.commercialfridgefreezer.com.au/pinnacle-pbmr-p-630-1-gd-1-glass-door-breast-milk-refrigerator/


Pinnacle PBMR-P-630-1-GD 1 Glass Door Breast Milk Refrigerator

\$5,345.00 +GST

View more Product Details

Add to Cart

Request a Quote

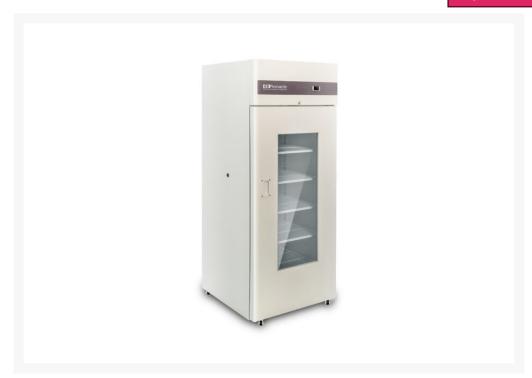

Pinnacle PBMR-P-630-1-GD 1 Glass Door Breast Milk Refrigerator

Experience the precision and reliability of the Pinnacle Breast Milk Refrigerator 630L, designed and manufactured by engineers in Australia. This refrigerator has been specifically designed to store expressed milk safely within the recommended temperature range of 1°C to 4°C.

Description

Pinnacle PBMR-P-630-1-GD 1 Glass Door Breast Milk Refrigerator

- High-Efficiency Insulation For remote data loggers and probes,
- Digital controller Digital controller with minimum and maximum temperature logging,
- Cable Port Hole For remote data loggers and probes,
- Door Lock To give product security,

- Door Switch Stops the fan when the door opens and reduces temperature fluctuations.
- Castors Large castors make moving the refrigerator easier,
- Coated Wire Shelves Open wire design to improve air circulation around the product,
- LED lighting Offers long-life operation and reduces heat load inside the cabinet,
- Cyclic defrost The fan-forced evaporator within the unit improves temperature uniformity and is automatically defrosted during an off cycle,
- Remote ALarms Contacts (BMS) This feature is primarily used by facilities that are not staffed 24 hours a day. The normally closed set of contacts will open if there is a high-temperature, low-temperature alarm, or power failure. Most often these alarm contacts can be hooked into the existing alarm system within the facility making it very cost-effective.

Additional Information

Country of Manufacture	Australia
External Colour	White
Brand	Pinnacle
Model	PBMR-P-630-1-GD
Warranty	24 Months Parts and Labour
Temperature Operating Range C	+2°C to +4°C
Temperature Display / Control	Digital
Climate / Ambient Temperature Rating	32°C
Refrigerant	R290
External Dimensions (mm)	790mm (W) 825mm (D) X 1965mm (H)
Leg / Caster information	Castor
Leg / Caster information Power Information	Castor 240 V / 50 Hz
Power Information	240 V / 50 Hz
Power Information Door Information	240 V / 50 Hz Triple Glazed Glass Insert
Power Information Door Information Interior Lighting	240 V / 50 Hz Triple Glazed Glass Insert LED
Power Information Door Information Interior Lighting No. of Shelves Included	240 V / 50 Hz Triple Glazed Glass Insert LED 5 Commercial Fridge & Freezer Sales Australia is committed to Providing best price, best quality , best brands and best support in