
## specifications



# **TMF650N-AC Series**

ActiveCore Series, 1 Door (Glass), Upright Freezer

Project: Item No:

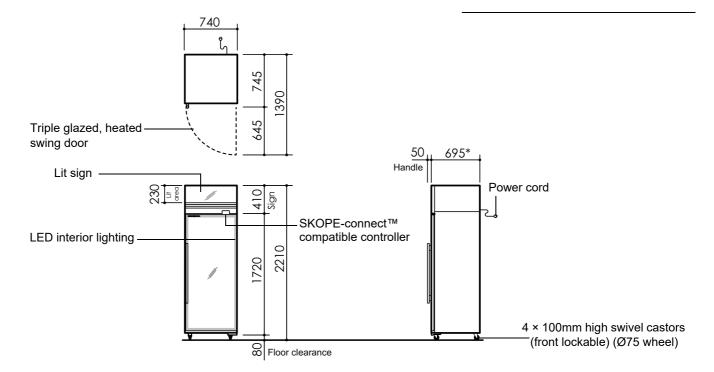

CABINET

1 × self-closing, triple glazed, single Low-E film, heated, lockable, argon

filled, toughened safety glass swing door (hinged RH)

Internal door opening 1 × door openings: 1570mm high × 620mm wide

5 × adjustable height wire shelves: 625mm wide × 470mm deep Shelves

Sign

Material Powdercoat galvanised steel

### **PERFORMANCE**

Max. ambient temp.

-21°C to -18°C (adjustable with SKOPE-connect™ -26°C to -12°C) Temperature range

Standard: ≤63.5 dB(A) Noise measurement Hush Mode: ≤61.5 dB(A)

**GEMS** class I 1

GEMS energy consumption 10.58 kWh/24h

GEMS annual running cost \$1,159 p.a.(@ \$0.30/kWh)

#### **ELECTRICAL**

Electrical safety climate class 5

Interior side lighting 1 × 1400mm, 15W LED Sign lighting 1 × 670mm, 7W LED

Power cord Supplied with 10 Amp plug and 2.3m lead Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 5.5 Amps (includes unit 3.5 Amps)

#### REFRIGERATION

Controller SCS Connect (SKOPE-connect™ compatible)

Connectivity interface Bluetooth

Refrigeration system Top mounted, integral, removable ActiveCore freezer cartridge

(UTHDNI-0043)

R290 / 107g (r Refrigerant

920 Watts (45 Nominal capacity Heat rejection (Avg./Peak) 440 Watts/520 Drainage No plumbing required

<del>(</del> 5)			
(natural refrigerant)	V	Ventilation requirements	
500rpm)	To	ор	300mm
, ,	S	Sides	Not required
0 Watts	В	Back	10mm

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2021 SKOPE Industries Limited

#### **DIMENSIONS** External Internal Height 2210mm 1570mm Width 740mm 640mm Depth 745mm 554mm $0.55m^{2}$ Floor area Weight 170kg Volume 610L

Depth 695mm excludes removable door handle and door

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements	
Тор	300mm
Sides	Not required
Back	10mm
Bottom	Not required

PSS0644 Rev. 1.1 Nov. 2021



Email: skope@skope.com, Website: www.skope.com